
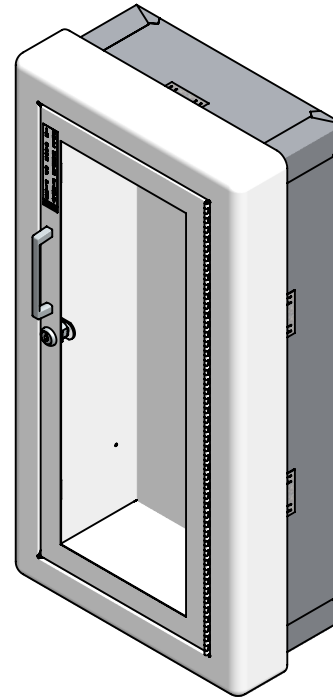


Architectural Series, Fire Protection Cabinet, Ambassador - C1017G10FX2

FE FX2 CABINET, AMBASSADOR, 3" RT, FL VIEW SAFTLOK, CLR ACR, CRS TUB, CRS DR/TRM, ALL WHT, 10 TUB

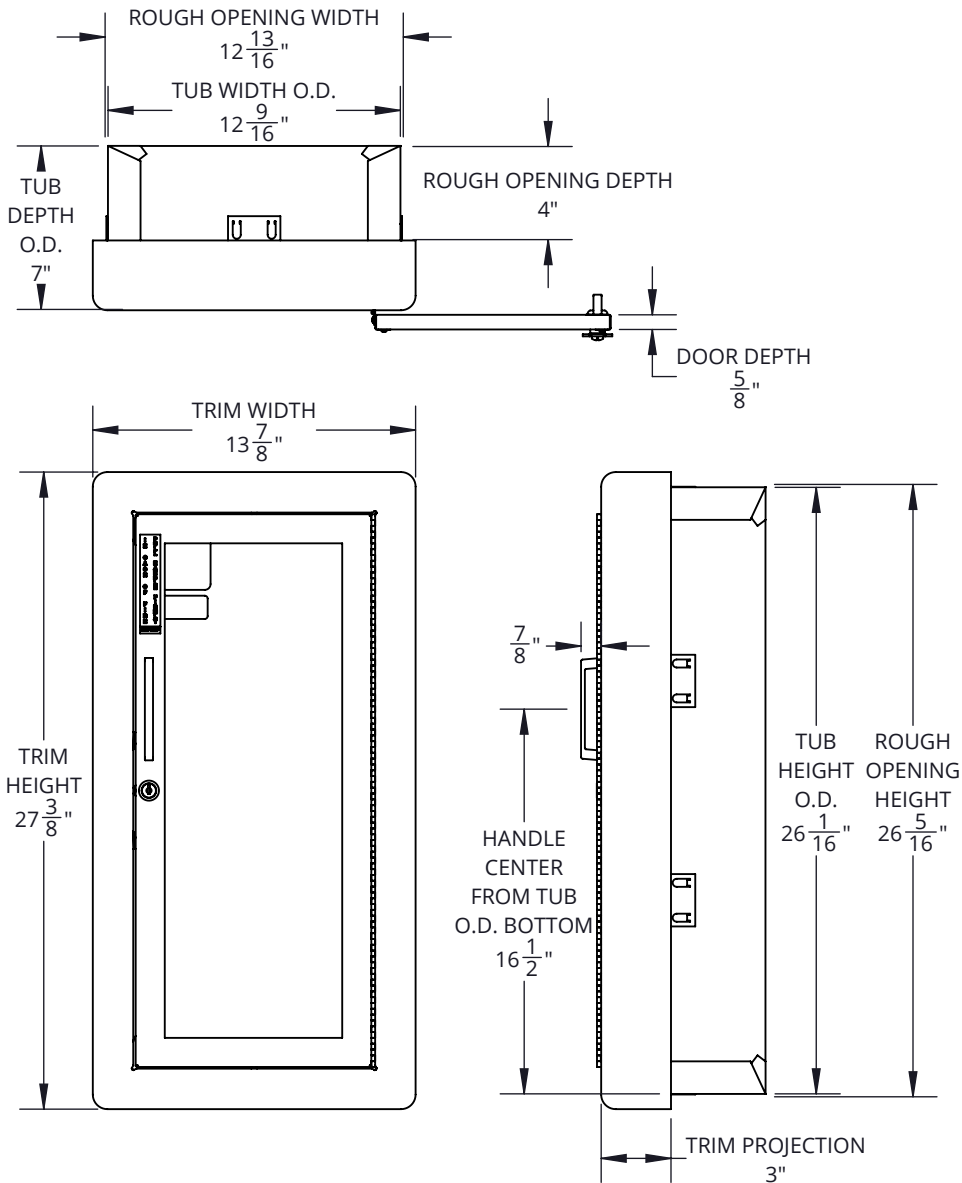

SPECIFICATIONS:

Tub Material: 24 gauge galvanized steel

Trim Material & Style: 20 gauge CRS, semi-recessed 3" rolled edge

Door Material & Style: 20 gauge CRS, full view

Flange Material: 22 gauge galvanized steel

Glazing: 0.090" clear acrylic (8- $\frac{1}{2}$ " x 22- $\frac{3}{4}$ ")

Finish: Powder coat white door and trim, painted white tub

Hinge: Continuous hinge opens door 180 degrees, 20 gauge CRS powder coat white

Hardware: Zinc plated pull handle, Saf-T-Lok™, glass clips & screws

Rough Opening: 12-13/16" x 26-5/16" x 4"

Fire Rating: UL classified and labeled up to 2 hours in accordance with UL 1479 (ASTM-E814) and CAN/USC-S115.

Insulation: Wool insulation

ADA Compliant: Cabinet meets 4" maximum protrusion, locate handle maximum 48" above floor

Compatible Extinguisher: Cosmic 2.5lb. - 10lb., Galaxy 2.5lb - 10lb., Mercury 2.5lb. - 5lb., Sentinel 5lb.

MODEL # BREAKDOWN:

C — Product Line: Fire protection, cabinet

10 — Tub Size: 10- $\frac{1}{2}$ " x 24" x 6"

1 — Trim and Door Material: CRS, powder coat finish

7 — Trim Style: Semi-recessed 3" rolled edge

G — Door Style: Full view, pull handle, Saf-T-Lok™

10 — Door Glazing: 0.090" clear acrylic

FX2 — Fire Rated

— Color: All white

REPLACEMENT PARTS:

Tub: TUB-10-7FX2

Trim: T-1017

Door: D-101G

Glazing: G10F10

Hardware Pack: HPPFUS, SL, LC

MODEL #: C1017G10FX2



800-554-6077

sales@activarcpg.com

www.activarcpg.com

9702 Newton Ave S. Bloomington, MN 55431 | Many Locations Nationwide

Distributor:

Project:

Contractor:

Approved By:

Date:

Quantity:

Architect:

Scale: 1:8.25

Pages: 1 OF 1

Drawing #:

C1017G10FX2-SUBMITTAL