
Architectural Series, Fire Protection Cabinet, Ambassador - C1017V17FX2 FE FX2 CABINET, AMBASSADOR, 3" RT, VERT DUO, CLR TEMP,CRS TUB, CRS DR/TRM, ALL WHT, 10 TUB

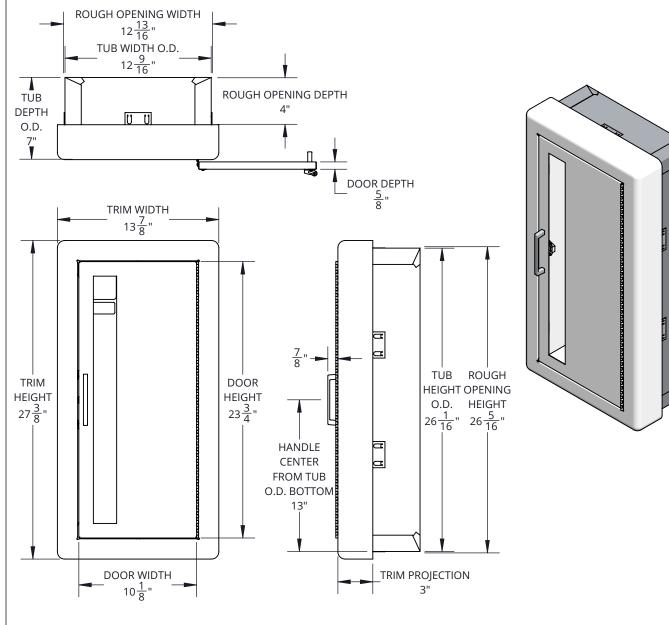

SPECIFICATIONS:

Tub Material: 24 gauge galvanized steel

Trim Material & Style: 20 gauge CRS, semi-recessed 3" rolled edge

Door Material & Style: 20 gauge CRS, vertical duo

Flange Material: 22 gauge galvannealed steel

Glazing: 1/8" clear tempered glass (8-1/2" x 22-3/4")

Finish: Powder coat white door and trim, painted white tub **Hinge:** Continuous hinge opens door 180 degrees, 20 gauge CRS powder coat white

Hardware: Zinc plated pull handle, roller catch, glass clips & screws

Rough Opening: 12-13/16" x 26-5/16" x 4"

Fire Rating: UL classified and labeled up to 2 hours in accordance with UL 1479 (ASTM-E814) and CAN/USC-S115. **Insulation:** Wool insulation

ADA Compliant: Cabinet meets 4" maximum protrusion,

locate handle maximum 48" above floor

Compatible Extinguisher: Cosmic 2.5lb. - 10lb., Galaxy 2.5lb -10lb., Mercury 2.5lb. - 5lb., Sentinel 5lb.

MODEL # BREAKDOWN:

C — Product Line: Fire protection, cabinet 10 — Tub Size: 10-½" x 24" x 6" 1 — Trim and Door Material: CRS, powder coat finish 7 — Trim Style: Semi-recessed 3" rolled edge V — Door Style: Vertical duo, pull handle, roller catch 17 — Door Glazing: ¹/₈" clear tempered glass FX2 — Fire Rated - Color: All white

REPLACEMENT PARTS:

Tub: TUB-10-7FX2 Trim: T-1017 Door: D-101V Glazing: G10F17 Hardware Pack: HPFPUS

MODEL #: C1017V17FX2

	800-554-6077	Distributor: Contractor:		Project:	
	sales@activarcpg.com			Approved By:	
	www.activarcpg.com	Date:	Quantity:	Architect:	
9702 Newton Ave S. Bloomington, MN 55431 Many Locations Nationwide		Scale: 1:8.25	Pages: 1 OF 1	Drawing #:	C1017V17FX2-SUBMITTAL
© 2024 Activar Construction Products Group, Inc.					REV: A 9/24/2024