

## Architectural Series, Fire Protection Cabinet, Ambassador - C1017W10FX2 FE FX2 CABINET, AMBASSADOR, 3" RT, VERT DUO SAFTLOK, CLR ACR, CRS TUB, CRS DR/TRM, ALL WHT, 10 TUB

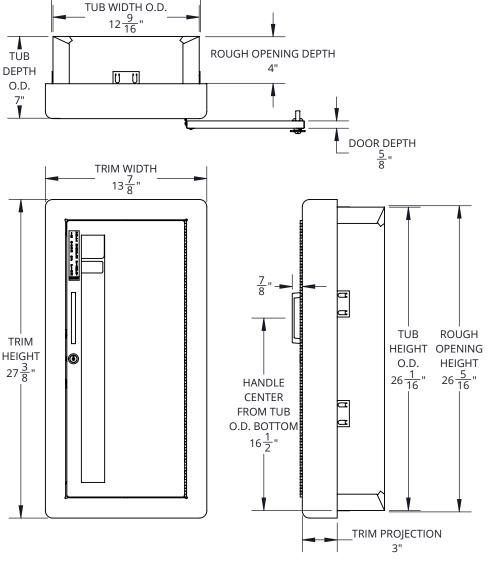

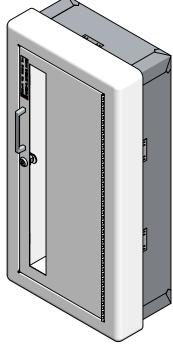

## SPECIFICATIONS:

Tub Material: 24 gauge galvanized steel

Trim Material & Style: 20 gauge CRS, semi-recessed 3" rolled

edge

Door Material & Style: 20 gauge CRS, vertical duo Flange Material: 22 gauge galvannealed steel **Glazing:** 0.090" clear acrylic (8-½" x 22-¾")

**Finish:** Powder coat white door and trim, painted white tub

Hinge: Continuous hinge opens door 180 degrees, 20 gauge

CRS powder coat white

**Hardware:** Zinc plated pull handle, Saf-T-Lok™, glass clips &

screws

**Rough Opening:** 12-13/16" x 26-5/16" x 4"

**Fire Rating:** UL classified and labeled up to 2 hours in accordance with UL 1479 (ASTM-E814) and CAN/USC-S115.

**Insulation:** Wool insulation

**ADA Compliant:** Cabinet meets 4" maximum protrusion,

locate handle maximum 48" above floor

Compatible Extinguisher: Cosmic 2.5lb. - 10lb., Galaxy 2.5lb -

10lb., Mercury 2.5lb. - 5lb., Sentinel 5lb.

## MODEL # BREAKDOWN:

C — Product Line: Fire protection, cabinet

10 — Tub Size: 10-½" x 24" x 6"

1 — Trim and Door Material: CRS, powder coat finish

7 — Trim Style: Semi-recessed 3" rolled edge

W — Door Style: Vertical duo, pull handle, Saf-T-Lok™

10 — Door Glazing: 0.090" clear acrylic

FX2 — Fire Rated

Color: All white

## **REPLACEMENT PARTS:**

Tub: TUB-10-7FX2

Trim: T-1017 Door: D-101W Glazing: G10F10

Hardware Pack: HPFPUS, SL, LC

**MODEL #: C1017W10FX2** 



800-554-6077 sales@activarcpg.com

www.activarcpg.com

9702 Newton Ave S. Bloomington, MN 55431 | Many Locations Nationwide

Distributor: Project: Contractor: Approved By: Architect: Date: Quantity: C1017W10FX2-SUBMITTAL 1:8.25 Drawing #: Scale: Pages: 1 OF 1

**ROUGH OPENING WIDTH** 

12 13 "