



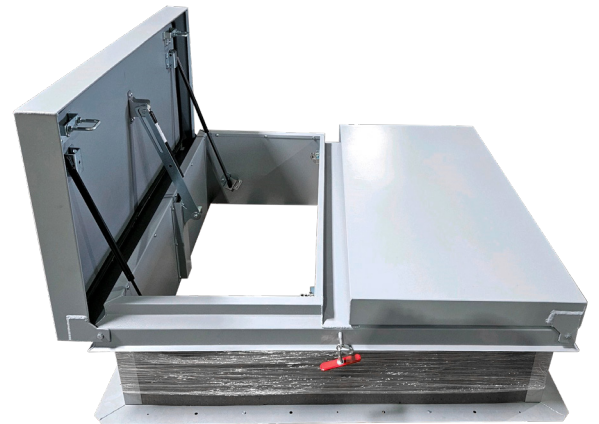

# DUR-RED'S FAHRENHEIT SERIES DOUBLE DOOR SMOKE VENTS

## UL 793 LISTED

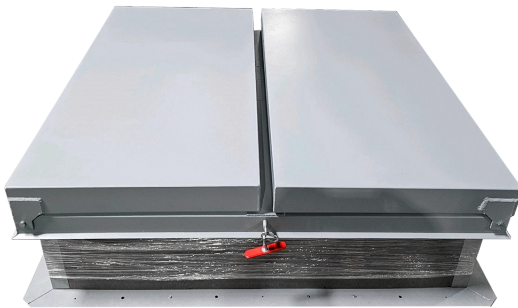

RVF

Our double door smoke vents automatically open during a fire when a fusible link melts, releasing harmful smoke and fumes. **These UL 793 listed smoke vents have a variety of options to fit many building types:** double wall curb, curb mount, 2" polyisocyanurate in curb, fusible links from 165° F - 450° F and electrical McCabe® links to tie into building alarm systems.



RVFV



# DUR-RED'S FAHRENHEIT SERIES DOUBLE DOOR SMOKE VENTS WITH UL 793 LISTING



## New Features:

- Rotary latch style catch that maintains strong latching strength up to **90 PSF wind uplift** without opening R-6 insulation in curb and cover, helps to maintain building energy efficiency
- **Domed units use double clear over white polycarbonate domes, which passed a 200 lb drop test**
- New and improved pull handle is easy to use and passed 250 pull openings
- Gas springs allow safer operation of opening smoke vent doors and snow load of 10 PSF
- Self-locking Hold Open Arm providing improved safety measures
- Damper to help control smoke vent door opening rate, of not less than 3 seconds, for better safety measures
- We have the capability to do retrofit curb mounted units (pictured below)



Curb mounted smoke vents installed on existing curb



ACTIVAR CONSTRUCTION PRODUCTS GROUP INC.

Visit [www.activarcpg.com](http://www.activarcpg.com) for more info

1-800-554-6077 | [SALES@ACTIVARCPG.COM](mailto:SALES@ACTIVARCPG.COM)

©2024 Activar Construction Products Group, Inc.

6-25-2024