


SLIMLINE™ VISION KITS FOR 3/16-1/4" GLASS: VSL, VSLR, VWL

Low Profile Beveled Vision Lite For Fire Rated Doors. Self-Attaching for Glass 3/16" to 1/4"
Frame Has Single-side Fasteners. Available in Round Shapes or Wood Veneer

SPECIFICATIONS:

Material:	20 gauge CRS frame. Min Size 4" x 4", Max 60" x 104". See Fire Rating Below.
Construction:	1-1/4" trim with radius corners, mitered and welded. Continuous glass retainer, countersunk mounting holes in the bevel on non-corridor side.
Door:	For 1-3/4" door. For other sizes, see models VSIG, VLFIG & VLFEZIG. Door cutout = order size.
Fasteners:	# 8 x 1" flathead phillips SMS to match finish. <u>Woodlite</u> has wood veneer plugs covering screw heads.
Powder Coat Finishes:	___ (B) Mineral Bronze ___ (G) Gray (stock colors for VSL) ___ (BK) Black ___ (FB) Flat Black ___ (W) White ___ (SB) SC Beige ___ (SI) Silver ___ (BA) Brass ___ (S) Sand ___ (AB) AMS Beige View Color Samples Online
Glass:	3/16" - 1/4" glazing to be ordered separately from glazing submittals. Visible light is 2" under rough opening size. Glass size is 1" under order size. Use fire rated glazing with Intertek Warnock Hersey (WHI) or UL classification markings for fire rated applications. Fire-Rated Air Louvers Glazing to fit this Product: WS, KFRF, PYRO, and PPF.
Fire-Rating, Testing & Listings:	When installed in properly rated and approved door, ratings up to 3 hours can be achieved for VSL and SLR, depending on the glazing used . See glazing ratings for max exposed area. Tested and Listed for UL10C and Criteria of UBC 7-2 Positive Pressure. See detailed installation instructions.

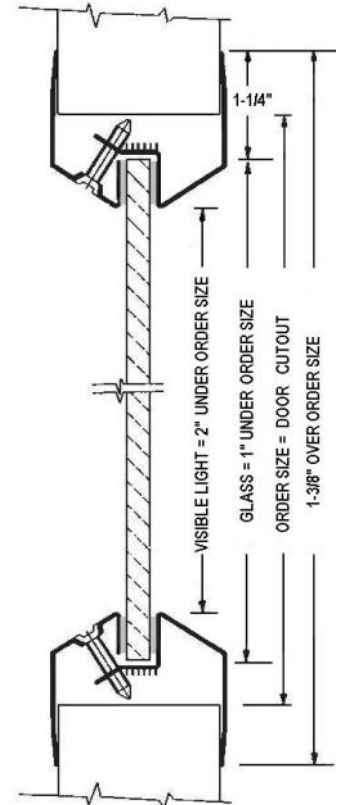

OPTIONS AT ADDITIONAL COST:



PAK:	Includes Vision Lite, Glass Sized to Fit, Applied Glazing tape for UL10B Installations, Securely Packaged Individually. See separate PAK submittals.
UBC 7-2 Installation:	___ Additional intumescent tape for Positive Pressure UL10C . See detailed installation instructions. NOTE: Intumescent tape NOT needed for 20 Minute Wood doors for UL Label.
Finishes & Materials:	___ (S) 20 Gauge Stainless Steel: #4 Finish. ___ (G) Galvanneal ___ (E) Zinc Plated
Woodlite Wood Veneers:	___ VWL .010 Wood Veneer. (N/A VSLR or Mullions) <i>Does not have wood finish, supplied by others</i> Sizes: Min 4" x 4", Max 48" x 77". Rated up to 90 mins. ___ Veneer Type: (MA) Maple, (WB) White Birch, (RO) Red Oak, (CH) Cherry. See website for more wood codes and photos. Samples upon request.
Fasteners:	___ Torx ___ Other: _____
Mullions:	Factory welded to vision lite & painted. See Mullions Page in this section to order.
Round Lite Two Sizes:	___ VSLR 12B: One piece, 20 gauge, bronze. 11" glazing. (N/A (S) or (G) material) ___ VSLR 18B: One piece, 20 gauge, bronze. 17" glazing. (N/A (S) or (G) material)
Custom:	Contact customer service for special orders.

STOCK ITEM - MANY STANDARD SIZES OF VSL FRAMES IN STOCK FOR NEXT DAY SHIPMENT FROM ALL WAREHOUSES

Order Format:

VSL, VSLR, VWL Option S,G,E W H Color

Example: VSL 1212W

Interpretation of Fire and Building Codes May Vary. Consult with the Local Authority Having Jurisdiction (AHJ) to determine appropriate standards.

 <p>AIR LOUVERS</p> <p>© 2023 Activar Construction Products Group, Inc.</p>	Distributor:	Width: ___ x Height: ___
	Architect:	Quantity:
	Contractor:	Model:
	Project:	Date: ___ Version: 11/17/23
<p>800-554-6077 QUOTES@ACTIVARCPG.COM ORDERS@ACTIVARCPG.COM SALES@ACTIVARCPG.COM</p> <p>WWW.ACTIVARCPG.COM</p> <p>MFG: COMMERCE CA, BLOOMINGTON, MN • WAREHOUSES: SEE WEBSITE FOR LOCATIONS</p>		