


UP TO 3 HOURS

VISION LITE - SLIMLINE™ SERIES WOODLITE VISION LITE - VWLH

Low profile Slimline™ vision lites mount flush to the door providing a clean aesthetic look. Woodlites™ include a beautiful wood veneer finish, designed to fit standard 1-3/4" doors and accommodates standard glazing thicknesses of 3/16", 1/4" and 5/16".

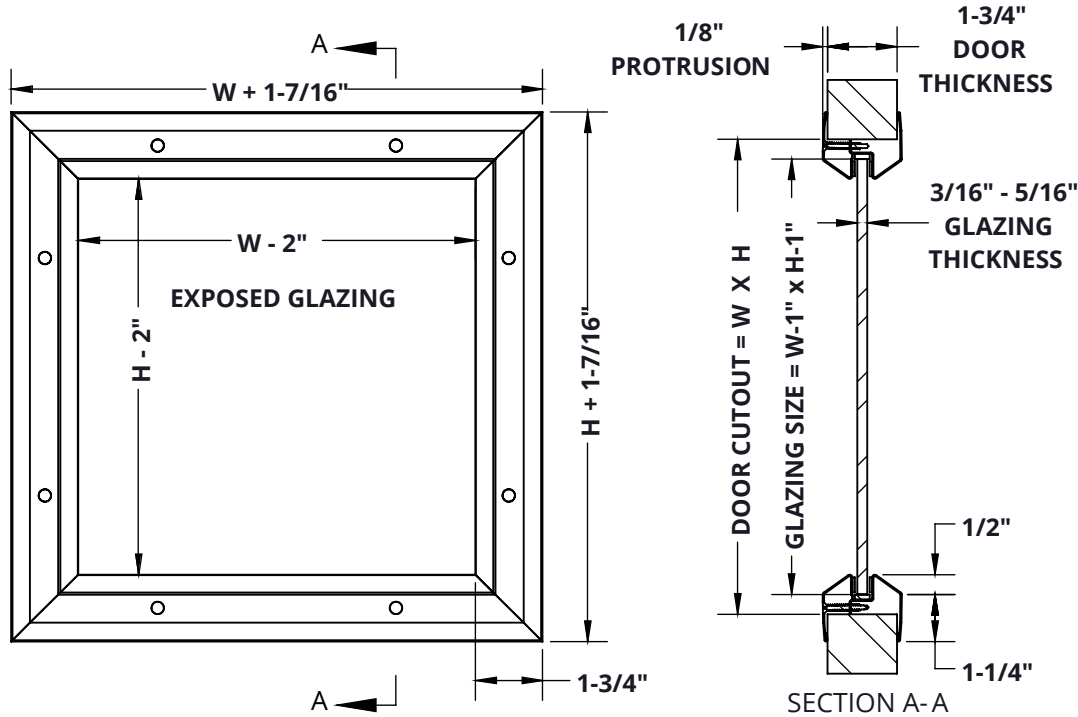

VWLH-1212ROR

SPECIFICATIONS:

Application: For door thickness 1-3/4" and glazing thickness 3/16" - 5/16"

Frame Material: 20 gauge cold rolled steel

Standard Finish: Gray powder coat with .010 wood veneer, select from standard options

Fasteners: #8 x 1-1/4" Flathead Phillips screws to match finish
Size:

Minimum: 4" x 4"

Maximum: 48" x 77"

Door Cutout = Order Size (W x H)

Glazing Size = Order Size minus 1" (W - 1" x H - 1")

Exposed Glazing = Order Size minus 2" (W - 2" x H - 2")

FIRE RATINGS:

UL listed and labeled/stamped to ANSI/UL 10B, ANSI/UL 10C and CAN/ULC S104 when properly installed in rated and approved door. Ratings up to 180 minutes can be achieved depending exposed glazing size and area.

OPTIONS:

PAks: Vision lite, glazing & glazing tape combined

Compatible Air Louvers Glazing:

Fire-Rated: PYRO, PPF, FL, FLP, WS

Non-Rated: TEMP

Other: Torx screws

Interpretation of fire and building codes may vary. Consult with the local authority having jurisdiction (AHJ) to determine appropriate standards.

TAPE WHEN SOLD SEPARATELY

Qty	Model	Description Dimensions
	GTAPE 200B	Standard glazing tape 1/16" 1/16" thick x 3/8" wide x 200 ft
	GTAPE-F-100B	Standard glazing tape 1/8" 1/8" thick x 3/8" wide x 100 ft
	FGS3000S90	Intumescent tape for wired glass 5/64" thick x 7/16" wide x 16 ft

Refer to glazing tape submittal for more information

AIR LOUVERS
9702 Newton Ave S. Bloomington, MN 55431 | Many Locations Nationwide

800-554-6077
sales@activarcpg.com
www.activarcpg.com

Distributor:		Project:
Contractor:		Approved By:
Date:		Architect:
Scale: N/A	Page 1 of 2	Item #:

VISION LITE - SLIMLINE™ SERIES WOODLITE VISION LITE - VWLH

MADE-TO-ORDER SLIMLINE™ WOODLITE VISION LITES - EXAMPLE: VWLH-2234MA

QTY	MODEL	WIDTH	HEIGHT	WOOD VENEER OPTIONS	PAK GLAZING	OPTIONS																																
	VWLH			<table border="1"> <tr><td>MA</td><td>(White Maple)</td></tr> <tr><td>WB</td><td>(White Birch)</td></tr> <tr><td>CH</td><td>(Cherry)</td></tr> <tr><td>VGF</td><td>(Fir Vertical Grain)</td></tr> <tr><td>MAR</td><td>(Mahogany African Ribbon Striped)</td></tr> <tr><td>RO</td><td>(Red Oak)</td></tr> <tr><td>ROR</td><td>(Red Oak Rift)</td></tr> <tr><td>WN</td><td>(Walnut)</td></tr> </table>	MA	(White Maple)	WB	(White Birch)	CH	(Cherry)	VGF	(Fir Vertical Grain)	MAR	(Mahogany African Ribbon Striped)	RO	(Red Oak)	ROR	(Red Oak Rift)	WN	(Walnut)	<table border="1"> <tr><td>(None)</td></tr> <tr><td>FL PAK</td><td>3/16" (Firelite NT)</td></tr> <tr><td>PPF PAK</td><td>3/16" (Pyran Platinum F)</td></tr> <tr><td>TEMP PAK</td><td>1/4" (Non-Rated Tempered)</td></tr> <tr><td>FLP PAK</td><td>5/16" (Firelite Plus)</td></tr> <tr><td>WS PAK</td><td>1/4" (Wireshield)</td></tr> <tr><td>PYRO PAK</td><td>1/4" (Pyroshield)</td></tr> </table>	(None)	FL PAK	3/16" (Firelite NT)	PPF PAK	3/16" (Pyran Platinum F)	TEMP PAK	1/4" (Non-Rated Tempered)	FLP PAK	5/16" (Firelite Plus)	WS PAK	1/4" (Wireshield)	PYRO PAK	1/4" (Pyroshield)	<table border="1"> <tr><td>(None)</td></tr> <tr><td>-T</td><td>(Torx Screw)</td></tr> </table>	(None)	-T	(Torx Screw)
MA	(White Maple)																																					
WB	(White Birch)																																					
CH	(Cherry)																																					
VGF	(Fir Vertical Grain)																																					
MAR	(Mahogany African Ribbon Striped)																																					
RO	(Red Oak)																																					
ROR	(Red Oak Rift)																																					
WN	(Walnut)																																					
(None)																																						
FL PAK	3/16" (Firelite NT)																																					
PPF PAK	3/16" (Pyran Platinum F)																																					
TEMP PAK	1/4" (Non-Rated Tempered)																																					
FLP PAK	5/16" (Firelite Plus)																																					
WS PAK	1/4" (Wireshield)																																					
PYRO PAK	1/4" (Pyroshield)																																					
(None)																																						
-T	(Torx Screw)																																					

It is the responsibility of the customer to communicate specifications and product performance requirements that are needed for their application. This document is intended to convey potential product configurations and offerings. It is not to be used to imply or represent a specification or rating, of finished products shipped. Detailed, specific submittals can be created upon request. It is the responsibility of the customer to specify product accordingly to comply with local laws, codes, and ordinances.