
Architectural Series, Fire Protection Cabinet, Ambassador - C1015F10 FE CABINET, AMBASSADOR, 3/8" FT, FULL VIEW, CLR ACR, CRS TUB, CRS DR/TRM, ALL WHT, 10 TUB

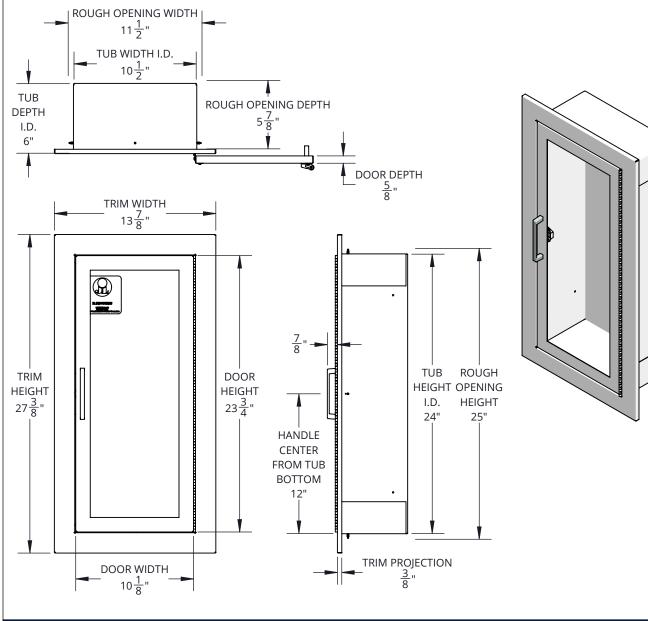

SPECIFICATIONS:

Tub Material: 24 gauge galvanized steel

Trim Material & Style: 20 gauge CRS, fully recessed %" square edge

Door Material & Style: 20 gauge CRS, full view

Glazing: 0.090" clear acrylic (8-1/2" x 22-3/4")

Finish: Powder coat white door and trim, painted white tub

Hinge: Continuous hinge opens door 180 degrees, 20 gauge CRS powder coat white

Hardware: Zinc plated pull handle, roller catch, glass clips & screws

Rough Opening: 11-½" x 25" x 5-%"

Fire Rating: Not rated

ADA Compliant: Cabinet meets 4" maximum protrusion, locate handle maximum 48" above floor

Compatible Extinguisher: Cosmic 2.5lb. - 10lb., Galaxy 2.5lb - 10lb., Mercury 2.5lb. - 5lb., Sentinel 5lb.

MODEL # BREAKDOWN:

- C Product Line: Fire protection, cabinet
- 10 Tub Size: 10-½" x 24" x 6"
- 1 Trim and Door Material: CRS, powder coat finish
- 5 Trim Style: Fully recessed 3/8" square edge
- F Door Style: Full view, pull handle, roller catch
- 10 Door Glazing: 0.090" clear acrylic
- Color: All white

REPLACEMENT PARTS:

Tub: TUB-10-PP Trim: T-1015 Door: D-101F Glazing: G10F10 Hardware Pack: HPFPUS

MODEL #: C1015F10

	800-554-6077	Distributor: Contractor:		Project:	
	🔀 sales@activarcpg.com			Approved By:	
	www.activarcpg.com	Date:	Quantity:	Architect:	
9702 Newton Ave S. Bloomington, MN 55431 Many Locations Nationwide		Scale: 1:8.25	Pages: 1 OF 1	Drawing #:	C1015F10-SUBMITTAL
© 2024 Activar Construction Products Group, Inc. THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC. AND SOLUTION OF ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC. AND SOLUTION OF ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC.					