

## Architectural Series, Fire Protection Cabinet, Academy - C1027W17 FE CABINET, ACADEMY, 3" RT, VERT DUO SAFTLOK, CLR TEMP, CRS TUB, ALUM DR/TRM, 10 TUB

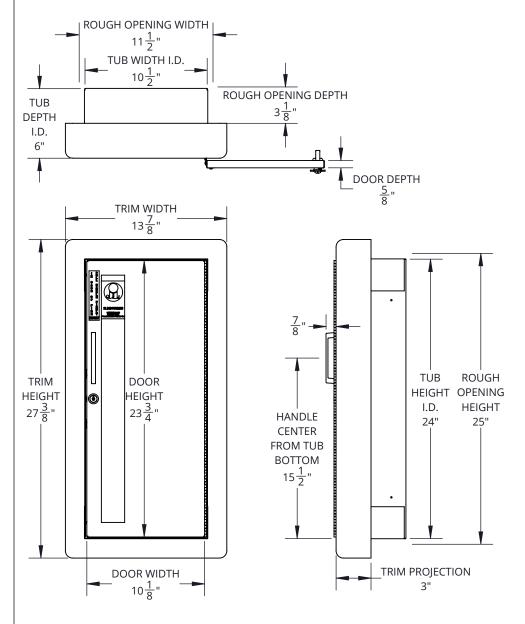

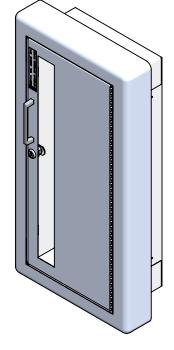

## SPECIFICATIONS:

Tub Material: 24 gauge galvanized steel

Trim Material & Style: 0.050" aluminum, semi-recessed 3"

rolled edge

Door Material & Style: 0.040" aluminum, vertical duo

Glazing: 1/8" clear tempered glass (8-1/2" x 22-3/4") Finish: Anodized door and trim, painted white tub

**Hinge:** Continuous hinge opens door 180 degrees, 20 gauge

zinc plated steel

**Hardware:** Zinc plated pull handle, Saf-T-Lok™, glass clips &

**Rough Opening:** 11-1/2" x 25" x 3-1/8"

Fire Rating: Not rated

ADA Compliant: Cabinet meets 4" maximum protrusion,

locate handle maximum 48" above floor

Compatible Extinguisher: Cosmic 2.5lb. - 10lb., Galaxy 2.5lb -

10lb., Mercury 2.5lb. - 5lb., Sentinel 5lb.

## MODEL # BREAKDOWN:

C — Product Line: Fire protection, cabinet

10 — Tub Size: 10-½" x 24" x 6"

2 — Trim and Door Material: Aluminum, anodized finish

7 — Trim Style: Semi-recessed 3" rolled edge

W — Door Style: Vertical duo, pull handle, Saf-T-Lok™

17 — Door Glazing: 1/8" clear tempered glass

## **REPLACEMENT PARTS:**

Tub: TUB-10-PP

Trim: T-1027

Door: D-102W

Glazing: G10F17

Hardware Pack: HPFPUS, SL, LC

MODEL #: C1027W17



800-554-6077 sales@activarcpg.com

www.activarcpg.com

9702 Newton Ave S. Bloomington, MN 55431 | Many Locations Nationwide © 2024 Activar Construction Products Group, Inc.

Distributor:		Project:
Contractor:		Approved By:
Date:	Quantity:	Architect:
Scale: 1:8.25	Pages: 1 OF 1	Drawing #: C1027W17-SUBMITTAL