
Architectural Series, Fire Protection Cabinet, Embassy - C5614V17 FE CABINET, EMBASSY, TRMLSS, VERT DUO, CLR TEMP,ALL CRS, ALL WHT, 56 TUB

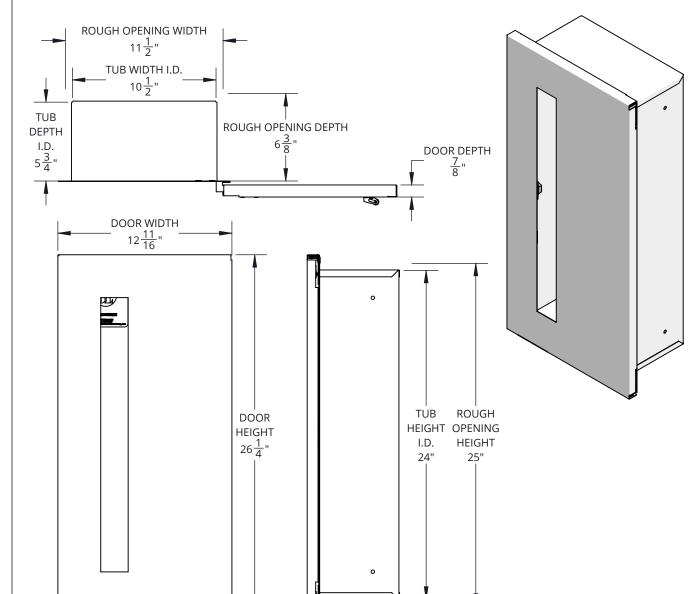

SPECIFICATIONS:

Tub Material: 22 gauge CRS

Door Material & Style: 20 gauge CRS, vertical duo **Glazing:** %" clear tempered glass (3-1/%" x 22-3/4")

Finish: Powder coat white door and white tub

Hinge: Continuous hinge opens door 180 degrees, 20 gauge

CRS

Hardware: Zinc plated pull handle, roller catch, glass clips &

screws

Rough Opening: 11-½" x 25" x 6-%"

Fire Rating: Not rated

ADA Compliant: Cabinet meets 4" maximum protrusion,

locate handle maximum 48" above floor

Compatible Extinguisher: Cosmic 2.5lb. - 10lb., Galaxy 2.5lb - 10lb., Mercury 2.5lb. - 5lb., Sentinel 5lb.

MODEL # BREAKDOWN:

C — Product Line: Fire protection, cabinet

56 — Tub Size: 10-½" x 24" x 5-¾"

1 — Trim and Door Material: CRS, powder coat finish

4 — Trim Style: Trimless recessed flange

V — Door Style: Vertical duo, pull handle, roller catch

17 — Door Glazing: 1/8" clear tempered glass

Color: All white

REPLACEMENT PARTS:

Tub: TUB-56 Door: D-561V Glazing: G10V17

Hardware Pack: HPFPUS

MODEL #: C5614V17



© 2024 Activar Construction Products Group, Inc.

800-554-6077
sales@activarcpg.com

www.activarcpg.com

9702 Newton Ave S. Bloomington, MN 55431 | Many Locations Nationwide

Distributor:		Project:
Contractor:		Approved By:
Date:	Quantity:	Architect:
Scale: 1:7	Pages: 1 OF 1	Drawing #: C5614V17-SUBMITTAL