

## Architectural Series, Fire Protection Cabinet, Ambassador - C1015V10 FE CABINET, AMBASSADOR, 3/8" FT, VERT DUO, CLR ACR, ALL CRS, ALL WHT, 10 SERIES

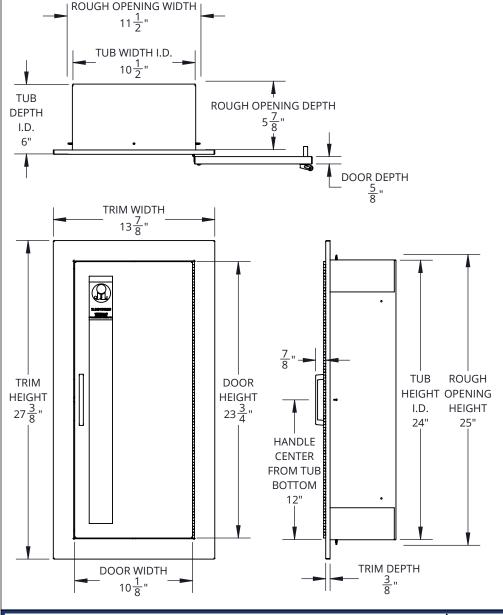

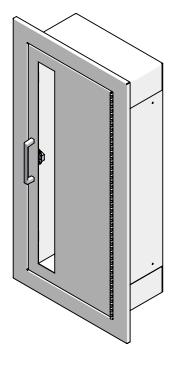

## SPECIFICATIONS:

Tub Material: 24 gauge galvanized steel

Trim Material & Style: 20 gauge CRS, full recessed %"

square edge

**Door Material & Style:** 20 gauge CRS, vertical duo

**Glazing:** .090" clear acrylic (8-1/2" x 22-3/4")

**Finish:** Powder coat white door and trim, painted white tub

Hinge: Continuous hinge opens door 180 degrees

**Hardware:** Zinc plated pull handle, roller catch, glass clips

& screws

**Rough Opening:** 11-½ x 25" x 5-%"

Fire Rating: Not rated

**ADA Compliant:** Cabinet meets 4" maximum protrusion.

Locate handle maximum 48" above floor.

Compatible Extinguishers: Cosmic 2.5lb. - 6lb., Galaxy 2.5

- 5lb, Mercury 2.5lb. – 5lb.

## MODEL # BREAKDOWN:

**C** — **Product Line:** Fire protection, cabinet

**10 — Tub Size:** 10-½" x 24" x 6"

1 — Trim and Door Material: CRS, powder coat finish

5 — Trim Style: Full recessed ¾", square edge

**V** — **Door Style:** Vertical duo, pull handle, roller catch

**10** — **Door Glazing:** 0.090" clear acrylic

- Color: All white

## **REPLACEMENT PARTS:**

**Tub:** TUB-10-PP **Trim:** T-1015 **Door:** D-101V **Glazing:** G10F10

Hardware Pack: HPFPUS

**MODEL #: C1015V10** 



800-554-6077

sales@activarcpg.com

www.activarcpg.com

9702 Newton Ave S. Bloomington, MN 55431 | Many Locations Nationwide
© 2024 Activar Construction Products Group, Inc.

THE INFORMATION CONTAINED IN THIS DRAW!

	Distributor:		Project:
	Contractor:		Approved By:
	Date:	Quantity:	Architect:
	Scale: 1:8.25	Pages: 1 OF 1	Drawing #: C1015V10-SUBMITTAL